



CONTACT US

Enquiries for: Americas
 OK International Corporation
 73 Bartlett Street
 Marlborough, MA 01752
 508-303-8286
 508-303-8207
 sales@okcorp.com

Enquiries for: British Isles, South Africa, Scandinavia, Israel, India, Southeast Asia, ANZ
 OK International Europe Ltd.
 OK House
 Shepherds Grove Industrial Estate West
 Stanton, Suffolk, IP 31 2AR
 England
 44 - 1359 - 250705
 44 - 1359 - 250165
 sales@okinteuropa.co.uk

Enquires for: Europe, Russia, Middle East, Africa
 OK Packaging Systems, B.V.
 P.O. Box 118, Heereweg 441A
 2160 AC Lisse
 The Netherlands
 31 - 252 - 216250
 31 - 252 - 214252
 sales@okpackaging.com

Enquiries for: China, Japan, Korea, Taiwan
 OK International Corporation
 500 Bibo Road
 Suite 201
 Zhang Jiang Hi-Tech Park
 Shanghai, PRC 201203
 sales@okichina.com


COMBINE YOUR SUPERFORMER WITH OUR BAG-IN-BOX PACKING LINES

Back in the early 1980's, OK International developed the first machine to convert gusseted rolls of polyethylene film into leak proof 5-seal block bottom bags, which has become the industry standard in semi-liquid applications and the core of our packing lines.

Today, we are the only company in the world that designs and manufactures complete turnkey bag-in-box packing lines consisting of case erectors, bag inserters, fillers, bag closers, case sealers and conveyors, predominantly in stainless steel.

This, in combination with our expertise in corrugated cases and polyethylene film, provides you with the ultimate single source solutions, the perfect package.

SUPERSYSTEM TECHNICAL SPECIFICATIONS	
Products:	Bakery products (fresh & frozen), candy, sugar, fruits & nuts, fish & meat products, snacks, hardware & plastics, oils & fats, powders, granules, vegetables, frozen food, coffee & tea.
Line output:	Up to 600 - 1200 cases/hour depending on product and case size.
Case sizes:	min. 10.00" x 8.00" x 6.00" 250 x 200 x 150 mm max. 24.00" x 16.00" x 16.00" 600 x 400 x 400 mm
Optional:	max. 30.00" x 18.00" x 16.00" 750 x 450 x 400 mm
Controls:	Allen Bradley or Siemens.
Finish:	Exterior stainless steel or all stainless steel.
Guarding:	All equipment is fully guarded with polycarbonate doors.

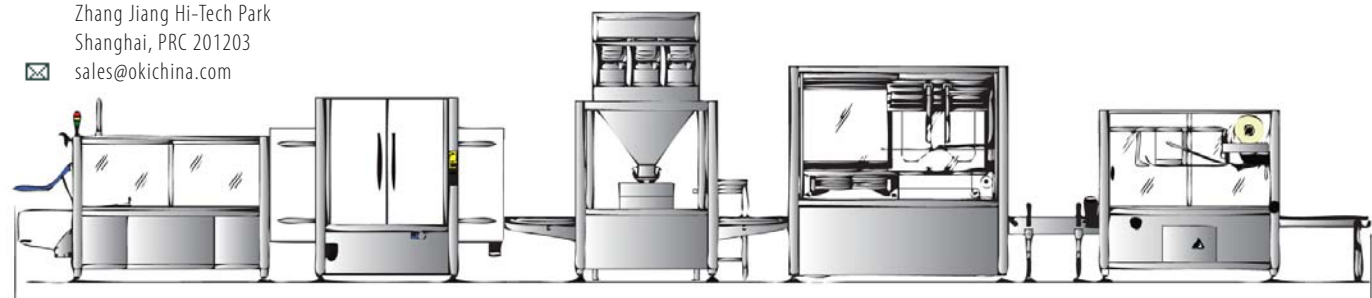

Case Erector Bag Inserter Product Filler Bag Closer Case Sealer

SUPERFORMER

AUTOMATIC CASE ERECTORS





Superformer SF1

SUPERFORMER SF1

AUTOMATIC CASE ERECTOR

The Superformer SF1 erects RSC cases, folds the bottom flaps and closes them with tape. Unique features of the machines include stainless steel exterior finish, automatic case squaring system, easy size change, tape and case monitoring.

TECHNICAL SPECIFICATIONS FOR THE SUPERFORMER SF1:

Case range:	Superformer SF1M	8.00" x 6.00" x 3.00" (L x W x H) min. 18.00" x 14.00" x 16.00" (L x W x H) max.
	Superformer SF1	8.00" x 8.00" x 6.00" (L x W x H) min. 24.00" x 20.00" x 24.00" (L x W x H) max.
	Superformer SF1L	14.00" x 10.00" x 6.00" (L x W x H) min. 31.50" x 20.00" x 24.00" (L x W x H) max.
Speed:	Superformer SF1M	Up to 16 cases per min.
	Superformer SF1	Up to 13 cases per min.
	Superformer SF1L	Up to 9 cases per min.

SUPERFORMER OPTIONS:

- Smaller case sizes.
- Powder coated finish.
- All stainless steel.
- OK 75 taping head for 3" wide tape.
- Case magazine 60" long.

SUPERFORMER SF2

AUTOMATIC HIGH SPEED CASE ERECTOR



The Superformer SF2 Automatic Case Erectors are a high speed double arm machines. All the great performance and features of the Superformer series in a fast and reliable platform.

TECHNICAL SPECIFICATIONS SUPERFORMER SF2:

Case range:	Superformer SF2M	8.00" x 6.00" x 3.00" (L x W x H) min. 16.00" x 14.00" x 16.00" (L x W x H) max.
	Superformer SF2:	12.00" x 10.00" x 6.00" (L x W x H) min. 27.50" x 18.00" x 20.00" (L x W x H) max.
Speed:	Superformer SF2M	Up to 25 cases/min.
	Superformer SF2	Up to 20 cases/min.

SUPERFORMER SF1-HM

AUTOMATIC HOT-MELT CASE ERECTOR



The Superformer SF1-HM erects corrugated cases and closes the bottom flaps with hot-melt glue. Unique features of this machine include stainless steel exterior finish, automatic case squaring system, easy size change, case monitoring and display with fault finding indications.

TECHNICAL SPECIFICATIONS SUPERFORMER SF1-HM:

Case range:	Superformer SF1M-HM	8.00" x 6.00" x 3.00" (L x W x H) min. 18.00" x 14.00" x 16.00" (L x W x H) max.
	Superformer SF1-HM	8.00" x 8.00" x 6.00" (L x W x H) min. 24.00" x 20.00" x 24.00" (L x W x H) max.

SUPERTAPER 1A

The Superformer case erectors are usually combined with a Supertaper case top taper or gluer to create an automatic system.



SERVING MANY DIFFERENT INDUSTRIES:



Fasteners, nuts, bolts, nails, screws.

Meats, poultry, seafood-fresh, frozen.

Fruits, nuts, vegetables.

Sugar, confectionery, chocolate.

Medical, biomedical pharmaceutical devices.

Herbs, spices, seed coffee, tea.

Cereals, crackers, rice, pasta, tortillas, snack food.

Chemicals, granules, pellets, powders.

Tortillas, bakery, fresh, par-baked, frozen.

Oils and fats: butter, margarine, shortening.

Caps, closures, cutlery, plastics.

Gypsum, joint compound, crack filler, asphalt.

