



**CONTACT US**

**Enquiries for: Americas**  
 OK International Corporation  
 73 Bartlett Street  
 Marlborough, MA 01752  
 508-303-8286  
 508-303-8207  
 sales@okcorp.com

**Enquiries for: British Isles, South Africa, Scandinavia, Israel, India, Southeast Asia, ANZ**  
 OK International Europe Ltd.  
 OK House  
 Shepherds Grove Industrial Estate West  
 Stanton, Suffolk, IP 31 2AR  
 England  
 44 - 1359 -250705  
 44 - 1359 - 250165  
 sales@okinteurope.co.uk

**Enquires for: Europe, Russia, Middle East, Africa**  
 OK Packaging Systems, B.V.  
 P.O. Box 118, Heereweg 441A  
 2160 AC Lisse  
 The Netherlands  
 31 - 252 - 216250  
 31 - 252 - 214252  
 sales@okpackaging.com

**Enquiries for: China, Japan, Korea, Taiwan**  
 OK International Corporation  
 500 Bibo Road  
 Suite 201  
 Zhang Jiang Hi-Tech Park  
 Shanghai, PRC 201203  
 sales@okichina.com

**COMBINE YOUR SUPERCLOSER WITH OUR BAG-IN-BOX PACKING LINES**

Back in the early 1980's, OK International developed the first machine to convert gusseted rolls of polyethylene film into leak proof 5-seal block bottom bags, which has become the industry standard in semi-liquid applications and the core of our packing lines.


Today, we are the only company in the world that designs and manufactures complete turnkey bag-in-box packing lines consisting of case erectors, bag inserters, fillers, bag closers, case sealers and conveyors, predominantly in stainless steel.

This, in combination with our expertise in corrugated cases and polyethylene film, provides you with the ultimate single source solutions, the perfect package.


SUPERSYSTEM TECHNICAL SPECIFICATIONS	
Products:	Bakery products (fresh & frozen), candy, sugar, fruits & nuts, fish & meat products, snacks, hardware & plastics, oils & fats, powders, granules, vegetables, frozen food, coffee & tea.
Line output:	Up to 600 - 1200 cases/hour depending on product and case size.
Case sizes:	min. 10.00" x 8.00" x 6.00"    250 x 200 x 150 mm max. 24.00" x 16.00" x 16.00"    600 x 400 x 400 mm
Optional:	max. 30.00" x 18.00" x 16.00"    750 x 450 x 400 mm
Controls:	Allen Bradley or Siemens.
Finish:	Exterior stainless steel or all stainless steel.
Guarding:	All equipment is fully guarded with polycarbonate doors.

# SUPERCLOSER

## POLYBAG-IN-BOX DECUFFER CLOSERS

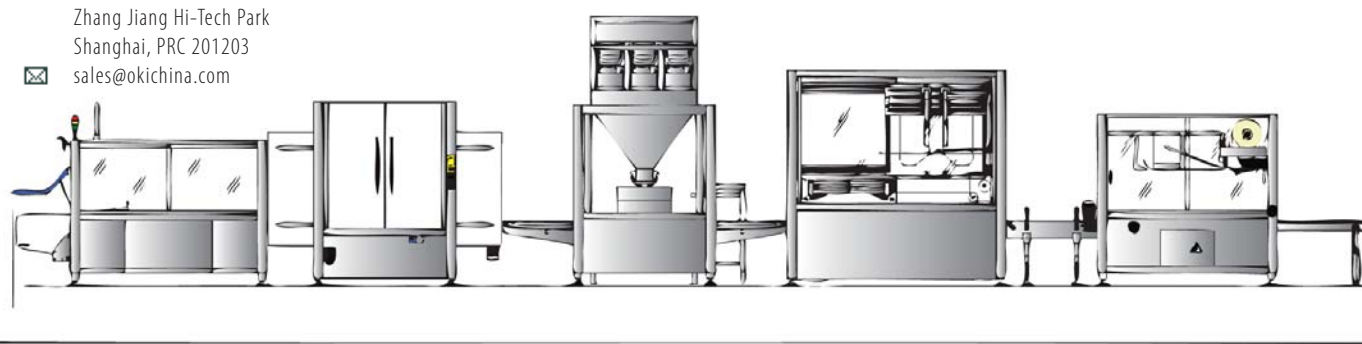

Case Erector      Bag Inserter      Product Filler      Bag Closer      Case Sealer

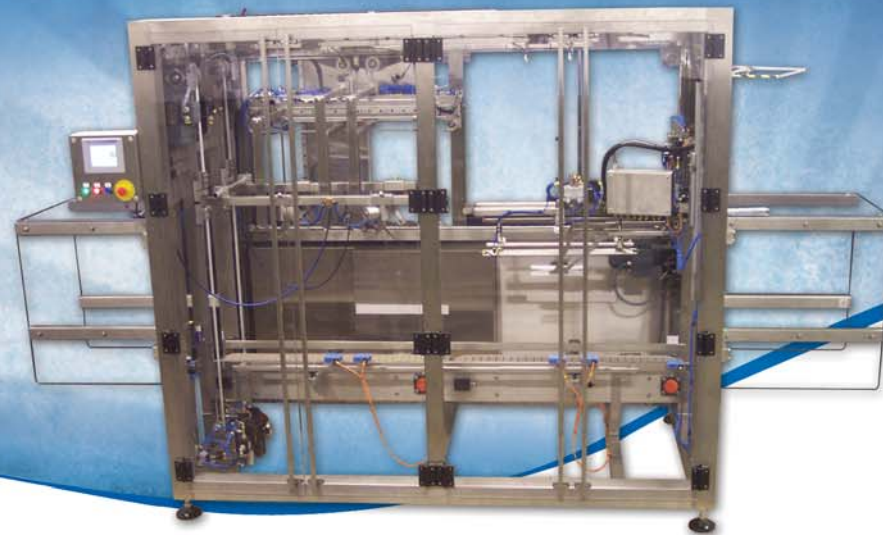

Supercluser SC300

## SUPERCLOSER SC300

POLYBAG-IN-BOX DECUFFER HEAT SEALER CLOSER

The Supercluser SC300 Polybag-in-Box Bag Decuffer Heat Sealer Closer automatically: Un-cuffs a filled polybag in a box, clear of the case flaps stretches the bag or re-folds gussets, tamps out excess air and heat seals the bag within the dimensions of the case to protect the product.

### TECHNICAL SPECIFICATIONS SUPERCLOSER SC300:

Case range:	10.00" x 8.00" x 4.00" (L x W x H) min. 24.00" x 18.00" x 20.00" (L x W x H) max.
Speed:	Up to 8 cases per min.
Bag materials:	1.25 - 3.0 mils standard polyethylene films.
Voltage:	480 VAC, 60 Hz, 3 Phase, or to local requirement.
Control Voltage:	24V DC.
Air requirements:	80 - 100 PSI, 1/2" supply.
Finish:	Stainless steel frame, covers, contact parts and electrical enclosure. Internal components anodized aluminum, stainless steel and plated.
Machine handling:	To requirement, right to left or left to right.

### SUPERCLOSER SC300 SYSTEMS:

- Bag Inserters.
- Case Erectors.
- Case Sealers.
- Fillers.
- Complete Systems.

## SUPERCLOSER SC400

POLYBAG-IN-BOX DECUFFER FOLDER CLOSER



The Supercluser SC400 mechanically un-cuffs a bag in a box clear of the case flaps, open the side flaps and folds the bag into a neat two-way fold to protect the filled product. Heat-sealing and other closing methods are optional.

### TECHNICAL SPECIFICATIONS SUPERCLOSER SC400:

Case range:	16.00" x 10.00" x 6.00" (L x W x H) min. 24.00" x 16.00" x 22.00" (L x W x H) max.
Speed:	Up to 15 cases per min.

### SUPERCLOSER SC400 OPTIONS:

- Automatic case sealer.
- Bag top heat seal assembly.
- Bag closure with tape, twist-tie or clip.
- Smaller or larger case sizes.

## SUPERCLOSER SC500


POLYBAG-IN-BOX DECUFFER SEALER CLOSER



The Supercluser SC500 Polybag-in-Box Bag Decuffer Heat Sealer Closer automatically: Un-cuffs a filled polybag in a box, clear of the case flaps stretches the bag or re-folds gussets, tamps out excess air and heat seals the bag within the dimensions of the case to protect the product.

### TECHNICAL SPECIFICATIONS SUPERCLOSER SC500:

Case range:	10.00" x 8.00" x 4.00" (L x W x H) min. 24.00" x 18.00" x 20.00" (L x W x H) max.
Speed:	Up to 12 cases per min.
Bag materials:	1.25 - 3.0 mils standard polyethylene films.
Voltage:	480 VAC, 60 Hz, 3 Phase, or to local requirement.

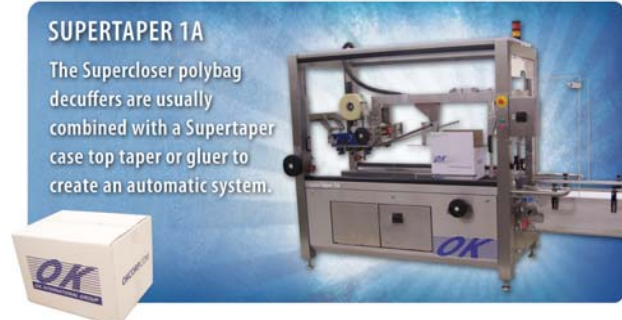

### SUPERTAPER 1A

The Supercluser polybag decuffers are usually combined with a Supertaper case top taper or gluer to create an automatic system.



### SERVING MANY DIFFERENT INDUSTRIES:



Fasteners, nuts, bolts, nails, screws.

Meats, poultry, seafood-fresh, frozen.

Fruits, nuts, vegetables.

Sugar, confectionery, chocolate.

Medical, biomedical pharmaceutical devices.

Herbs, spices, seed coffee, tea.

Cereals, crackers, rice, pasta, tortillas, snack food.

Chemicals, granules, pellets, powders.

Tortillas, bakery, fresh, par-baked, frozen.

Oils and fats: butter, margarine, shortening.

Caps, closures, cutlery, plastics.

Gypsum, joint compound, crack filler, asphalt.



OKCORP.COM