

SUPERTAPER ST1M

SEMI-AUTOMATIC CASE SEALER



The Supertaper ST1M seals cases on the top and bottom with tape. Features include: stainless steel exterior finish, high-quality taping heads with open tape feed path, heavy duty side belts with 1/4 hp motors and quick and easy size change.





TECHNICAL SPECIFICATIONS SUPERTAPER ST1M:

Case range:	120mm x 120mm x 85mm at 40mm flap length. (L x W x H) min. 120mm x 120mm x 100mm at 60mm flap length. (L x W x H) min. Unlimited x 508mm x 508mm (L x W x H) max.
Case weight:	Up to 40kg.
Belt speed:	20 meters/min.
Finish:	Stainless steel frame, legs and top structure.
Taping heads:	OK 55 high-quality taping heads with open tape feed path suitable for 2.00" wide tape (max.) and 14.00" diameter rolls.
Power requirements:	Voltages to requirement.
Conveyor motors:	Two 0.18 Kw. motors.
Side belts:	95mm wide belts.
Protection class:	Nema 12.
Infeed/discharge height:	550mm - 800mm
Machine dimensions:	965mm x 965mm x 1370mm (L x W x H), excluding roller conveyors.

SUPERTAPER ST1M OPTIONS:


- Case forming and pack station.
- Top tape only version.
- All stainless steel.
- Infeed and discharge roller conveyors
L = 450mm, 1000mm or 2000mm
- OK-75 75mm taping heads.
- Bottom tape only version.
- Castors.

FEATURES

Stainless steel exterior finish.
Heavy duty motors and belts.
95mm wide resilient side belts.
Quick and easy size change.
Open tape feed path.
Case top compression rollers.

BENEFITS

Clean and durable, preferred in food and other industries.
Suitable for demanding applications and cases up to 90 lbs.
Handles light, heavy or bulging cases.
Increased flexibility and production efficiency.
Quick and operator friendly roll changes.
Consistent top seal and enhanced cosmetics.

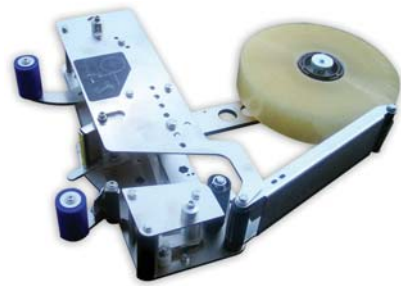

OK-55 & OK-75 TAPING HEADS

- Corrosion resistant.
- Rugged construction.
- Open tape feed path for easy roll loading.
- Positive tape application.
- Knife guard for operator safety.
- No lubrication or oil required.
- Handles all standard tape brands and grades.
- Adjustable flap length 38mm or 57mm.
- OK-55: 50mm wide tape (max.)
- OK-75: 75mm wide tape (max.)
- 355mm diameter rolls (max.)



OK Tape



Our machines can be used to pack almost any product:

Fruits, nuts, vegetables, scallions, meats, poultry, seafood, cereals, crackers, rice, pasta, tortillas, snack food, sugar, cutlery, chocolate, herbs, spices, seed, coffee, tea, bakery goods, gypsum, asphalt, caps, closures, plastics, screws, medical devices, oils & fats, powders, pharmaceutical devices.



OK International Corporation
73 Bartlett Street
Marlborough, MA 01752
508-303-8286
508-303-8207
sales@okcorp.com