

# SUPERTAPER ST1X

## SEMI-AUTOMATIC CASE SEALER AND PACK STATION



The Supertaper ST1X is a top and bottom case sealer with extended side belts and an integrated case forming and pack station. The machine provides an efficient and ergonomic solution for the forming, packing and sealing of RSC cases. The machine is also available without a top structure, making it suitable for semi automatic case forming and bottom taping.





## TECHNICAL SPECIFICATIONS SUPERTAPER ST1X:

Case range:	5.00" x 5.00" x 4.00" (L x W x H) min. 20.00" x 20.00" x 20.00" (L x W x H) max.
Case weight:	Up to 55 lbs.
Belt speed:	65 ft/min.
Finish:	Stainless steel frame, legs and top structure.
Taping heads:	OK 55 high-quality taping heads with open tape feed path suitable for 2.00" wide tape (max.) and 14.00" diameter rolls.
Power requirements:	Voltages to requirement.
Conveyor motors:	Two 0.25 HP motors
Side belts:	4.00" wide belts
Protection class:	Nema 12.
Infeed/discharge height:	22.00" - 31.00"
Machine dimensions:	91.00" x 38.00" x 54.00" (L x W x H), at minimum working height, excluding discharge roller conveyor.

## SUPERTAPER ST1X OPTIONS:

- Castors.
- All Stainless Steel.
- OK 75 taping heads for 3.00" wide tape .
- Semi automatic case erecting/ bottom taping version
- Discharge roller conveyors, lengths 16.00", 40.00", 80.00."




Supertaper ST1X semi automatic case former and bottom taper with automatic case squaring

## FEATURES

Stainless steel exterior finish.	Clean and durable, preferred in food and other industries.
Heavy duty motors and belts.	Suitable for demanding applications and cases up to 90 lbs.
Extended belts, 7-flap folder	Minimizes operator handling and fatigue.
Quick and easy size change.	Increased flexibility and production efficiency.

## BENEFITS

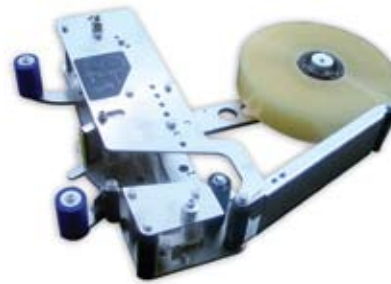

## OK-55 & OK-75 TAPING HEADS

- Corrosion resistant.
- Rugged construction.
- Open tape feed path for easy roll loading.
- Positive tape application.
- Knife guard for operator safety.
- No lubrication or oil required.
- Handles all standard tape brands and grades.
- Adjustable flap length 1.50" or 2.25"
- OK-55: 2.00" wide tape (max.)
- OK-75: 3.00" wide tape (max.)
- 14.00" diameter rolls (max.)



**Our machines can be used to pack almost any product:**

Fruits, nuts, vegetables, scallions, meats, poultry, seafood, cereals, crackers, rice, pasta, tortillas, snack food, sugar, cutlery, chocolate, herbs, spices, seed, coffee, tea, bakery goods, gypsum, flatbread, caps, closures, plastics, screws, medical devices, powders, pharmaceutical devices.



OK International Corporation  
73 Bartlett Street  
Marlborough, MA 01752  
USA  
1-508-303-8286  
1-508-303-8207  
sales@okcorp.com