



# SUPERTAPER

## SEMI-AUTOMATIC CASE SEALERS



### CONTACT US

**Enquiries for: Americas**  
 OK International Corporation  
 73 Bartlett Street  
 Marlborough, MA 01752  
 508-303-8286  
 508-303-8207  
 sales@okcorp.com


**Enquiries for: British Isles, South Africa, Scandinavia, Israel, India, Southeast Asia, ANZ**  
 OK International Europe Ltd.  
 OK House  
 Shepherds Grove Industrial Estate West  
 Stanton, Suffolk, IP 31 2AR  
 England  
 44 -1359 -250705  
 44 - 1359 - 250165  
 sales@okintoeurope.co.uk

**Enquires for: Europe, Russia, Middle East, Africa**  
 OK Packaging Systems, B.V.  
 P.O. Box 118, Heereweg 441A  
 2160 AC Lisse  
 The Netherlands  
 31 - 252 - 216250  
 31 - 252 - 214252  
 sales@okpackaging.com

**Enquiries for: China, Japan, Korea, Taiwan**  
 OK International Corporation  
 500 Bibo Road  
 Suite 201  
 Zhang Jiang Hi-Tech Park  
 Shanghai, PRC 201203  
 sales@okichina.com

### SEMI-AUTOMATIC MODELS FROM CHICAGO TAPERS

Chicago Tapers, an OKI Group Company, specializes in a wide range of high quality Case Erectors, Case Sealers and Pack Stations, specializing in solutions for the dry goods, fastening, cosmetics, computer, and contract packaging industries.



CT-7 SA

#### SEMI AUTOMATIC CASE TAPER

The CT-7 SA is loaded with features and boasts an open face tape head which is easy to thread and light weight. Other standard include a roller bed table, casters, compression wheels, entrance & exit roller tables.



CT-8 SA

#### SEMI AUTOMATIC CASE TAPER

The CT-8 SA is a full stainless steel top and bottom case sealer. This Semi Automatic Case Taper provides our customers with uptime reliability while keeping maintenance costs down to a minimum.



CT-9 SAR

#### SEMI AUTOMATIC RANDOM CASE TAPER

The CT-9 SAR is a compact random top and bottom case sealer. The taper can seal multiple sizes of cases without the operator performing a changeover. Operator simply presents case with all flaps closed to the sealer. Top tape head and side belt drives will adjust automatically to each individual sized case.





Supertaper ST1M

## SUPERTAPER ST1M

SEMI-AUTOMATIC CASE SEALER

The Supertaper ST1M Semi-Automatic Uniform Case Sealer is a solid and compact side belt driven case sealer, suitable to seal cases quickly, efficiently and neatly.

### TECHNICAL SPECIFICATIONS SUPERTAPER ST1M:

Case range:	4.75" x 4.75" x 3.25" at 1.5" flap length (L x W x H) min. 4.75" x 4.75" x 4.00" at 2.25" flap length (L x W x H) max. Unlimited x 20.00" x 20.00" (L x W x H) max.
Case weight:	Up to 90 lbs.
Belt speed:	65 ft/min.
Finish:	Stainless steel frame, legs and top structure.
Taping heads:	OK 55 high-quality taping heads with open tape feed path suitable for 2.00" wide tape (max.) and 14.00" diameter rolls.

### SUPERTAPER ST1M OPTIONS:

- Case forming and pack station.
- Top tape only version.
- All stainless steel.
- OK-75 3.00" taping heads.
- Bottom tape only version.
- Castors.

## SUPERTAPER ST1X

SEMI-AUTOMATIC CASE SEALER AND PACK STATION



The Supertaper ST1X is a stainless steel top and bottom case taper with extended side belts and an integrated case forming and pack station. The machine provides an efficient and ergonomic solution for the forming, packing and sealing of RSC cases.

### TECHNICAL SPECIFICATIONS SUPERTAPER ST1X:


Case range:	5.00" x 5.00" x 4.00" (L x W x H) min. 20.00" x 20.00" x 20.00" (L x W x H) max.
Case weight:	Up to 55 lbs.
Belt speed:	65 ft/min.
Finish:	Stainless steel frame, legs and top structure.
Taping heads:	OK 55 high-quality taping heads with open tape feed path suitable for 2.00" wide tape (max.) and 14.00" diameter rolls.

### SUPERTAPER ST1X OPTIONS:

- Castors.
- All Stainless Steel.
- OK 75 taping heads for 3.00" wide tape .
- Semi automatic case erecting/ bottom taping version
- Discharge roller conveyors, lengths 16.00", 40.00", 80.00".

## OK-55 & OK-75

TAPING HEADS FOR 2" AND 3" WIDE TAPE

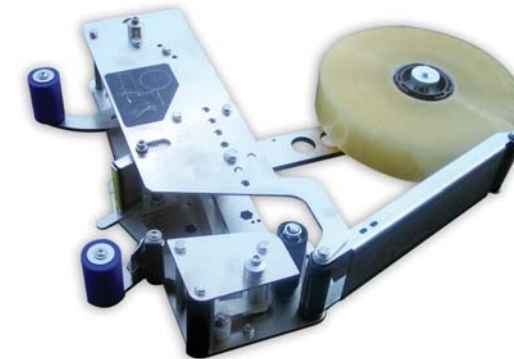

The OK-55 & OK-75 taping heads are designed to handle all standard tape brands. It is unique with its easy roll change system, no lubrication requirement, and open tape feed path.

### OK-55 & OK-75 TAPING HEAD FEATURES:

- Corrosion resistant.
- Open tape feed path for easy roll loading.
- Knife guard for operator safety.
- Handles all standard tape brands and grades.
- OK-55: 2.00" wide tape (max.)
- OK-75: 3.00" wide tape (max.)
- Rugged construction.
- Positive tape application.
- No lubrication or oil required.
- Adjustable flap length 1.50" or 2.25".
- 14.00" diameter rolls (max.)



OK Tape



### SERVING MANY DIFFERENT INDUSTRIES:



Fasteners, nuts, bolts, nails, screws.

Meats, poultry, seafood-fresh, frozen.

Fruits, nuts, vegetables.

Sugar, confectionery, chocolate.

Medical, biomedical pharmaceutical devices.

Herbs, spices, seed coffee, tea.

Cereals, crackers, rice, pasta, tortillas, snack food.

Chemicals, granules, pellets, powders.

Tortillas, bakery, fresh, par-baked, frozen.

Oils and fats: butter, margarine, shortening.

Caps, closures, cutlery, plastics.

Gypsum, joint compound, crack filler, asphalt.



OKCORP.COM