




SUPERCLOSER
SC410

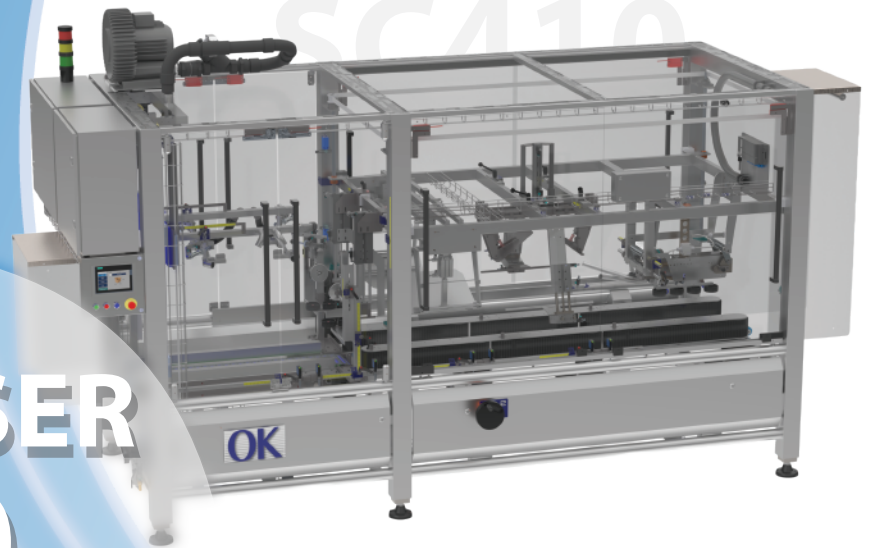

SUPERCLOSER SC410

POLYBAG-IN-BOX DECUFFER FOLDER & TOP TAPER

Automation designed for demanding requirements

The Supercloser SC410 automatically un-cuffs a filled polybag-in-box clear of the case flaps and seals the case. The SC410 opens the side flaps, folds the bag in a neat two-way fold to protect the filled product, closes the flaps and tapes the top of the cases. The machine has a clean compact design that is suitable for demanding applications in food and non-food applications.

Heavy-Duty & Reliable

- STAINLESS-STEEL CONSTRUCTION
- DUAL FUNCTION SYSTEM
- TOUCHSCREEN CONTROLS WITH ALARMS
- WIDE RANGE OF CASE SIZES
- CUSTOMIZED FOR EACH APPLICATION



 WATCH OUR VIDEOS
& LEARN MORE AT:
OKCORP.COM



TECHNICAL SPECIFICATIONS:

Case Range:	8.00" x 5.00" x 3.00" (L x W x H) min. 250mm x 200mm x 150mm (L x W x H) min. 24.00" x 20.00" x 24.00" (L x W x H) max. 500mm x 400mm x 500mm (L x W x H) max.
Speed:	Up to 12 cases/min.
Bag materials:	All standard polyethylene films (HDPE, LDPE, LLDPE, co-extrusions).
Bag Gauges:	1.0 - 4.0 mil (25 - 100 micron) depending on material.
Tape Applicators:	OK-55 high-quality, light-weight taping heads with open tape feed path, suitable for all standard 2" wide pressure sensitive tapes up to 14" roll diameter.
Electric:	3 Phase Voltages to requirement.
Pneumatic Requirements:	80-100psi (6-8 bar), clean & dry air.
Controls:	Allen Bradley or Siemens PLC with touch screen display & alarms.
Finish:	Stainless-steel frame, covers and electrical enclosure.
Machine handling:	Right to left, or left to right

ADD-ON OPTIONS

- OK-75 taping head for 3" wide tape
- Top Sealing with hot-melt glue
- Bag-top heat seal assembly
- Smaller or larger case sizes
- Can be integrated into Supersystem for maximum efficiency.




FEATURES


BENEFITS

Stainless-steel finish:	Clean and durable, maintains hygiene.
Heavy-duty conveyor system:	Highest speed at low maintenance.
In-feed gate:	Separates cases for automatic operation.
Fully interlocking guarding:	Operator safety and OSHA compliance.
Touch screen display:	Operator friendly and easy troubleshooting

**NEED A COMPLETE PACKAGING LINE?
WE'LL DESIGN & MANUFACTURE IT.**

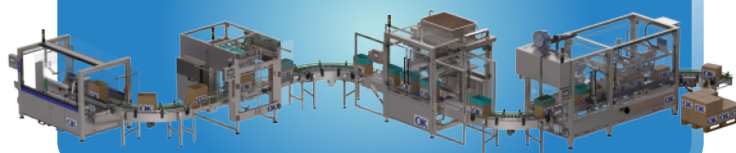

SC410 DIMENSION DRAWING

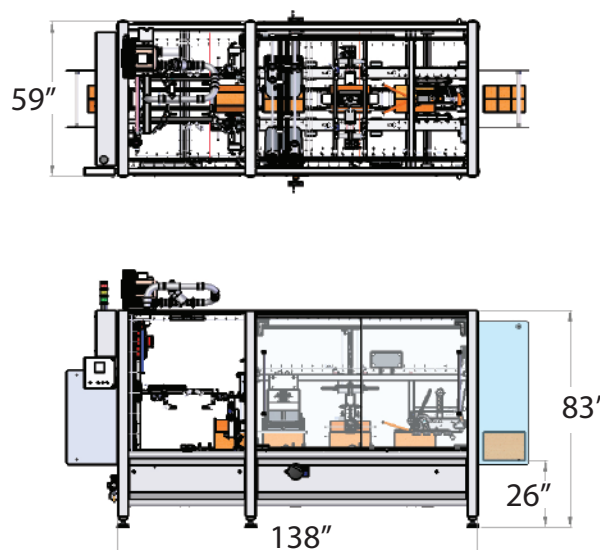

OK International Corporation

73 Bartlett Street
Marlborough, MA 01752
USA
1-508-303-8286
sales@okcorp.com

OK International Europe Ltd.

OK House
Shepherds Grove Industrial Estate
West Stanton, Suffolk, IP 31 2AR
England
44-1359-250705
uksales@okcorp.com

OK Packaging Systems B.V.

Heereweg 441-a
2161 DB Lisse
Nederland
31-252-216250
nlsales@okpackaging.com

 **WATCH OUR VIDEOS
& LEARN MORE AT:**
OKCORP.COM